

KENNEDY 240 to 110V Site Transformers
QUALITY INDUSTRIAL TOOLING

Manufactured to stringent quality levels ensuring all sockets and outlets comply with **BS4343**. With thermal overload, push button reset, replaceable internal fuses and strong, robust cases. For use with all portable power tools and machinery to ratings given. 240V input - 110V output. C.T.E. two metre cable. All with two outlets except for 750VA rating model which has 1 outlet only.



Plastic Cased



Plastic Cased

Rating	Weight each	Order Code	List Price/1	Offer Price/1
750VA	10.0kg	-0010K	£91.17	£54.70
1500VA	15.0kg	-0030K	£118.76	£71.26
2250VA	16.0kg	-0050K	£135.55	£81.33
3000VA	20.0kg	-0070K	£149.94	£89.96

Metal Cased

Rating	Weight each	Order Code	List Price/1	Offer Price/1
750VA	10.0kg	-1010K	£103.77	£62.26
1500VA	15.0kg	-1030K	£150.04	£90.02
2250VA	16.0kg	-1050K	£166.93	£100.16
3000VA	20.0kg	-1070K	£187.36	£112.42

Metal Cased

Continuous Rated Transformers

Double wound with 2 metre cable. Comes with 13 amp spin plug. To suit products fitted with 32 amp plugs. Ideal for use with heaters and 32 amp rated power tools

**Metal case, **Plastic case*

Rating	Power Outlets	Order Code	List Price/1	Offer Price/1
3KVA*	1x32A	-1530K	£451.00	£270.60
5KVA**	1x32A, 2x16A	-1550K	£574.00	£344.40

3 Pin Plugs for Site Use

Rated to 16A over 6 hours. Colour coded: 110V yellow, 240V blue. Conform to **BS 4343 : 1968**.

110V Plugs



240V Plugs



Voltage	Weight each	Order Code	List Price/1	Offer Price/1
110V	110g	-1110K	£3.63	£2.61
240V	110g	-1115K	£3.81	£2.74

3 Pin Sockets for Site Use

Fitted with fully waterproof spring loaded caps. Rated to 16A over six hours. Colour coded: 110V yellow, 240V blue. Conform to **BS 4343 : 1968**.

110V Sockets



240V Sockets



Voltage	Weight each	Order Code	List Price/1	Offer Price/1
110V	150g	-1120K	£5.41	£3.90
240V	150g	-1125K	£5.41	£3.90

Spider Ball 4-Way 110V 16A Splitter Box


A 4 way splitter box that is water resistant self stabilizing housing. 4 x 16Amp Defender Panel Socket outlets with LED power on indicators 3Mtrs of 2.5mm² 3G low temperature PVC cable. Internally wired using 2.5mm cable. 2.5mm² internal cable from 4 x 16Amp outlets - Safer than using 1.5mm cable — heat issues!! Improved strain relief — secure input cable Fitted with Defender 16Amp Plug Plastic housing — improved electrical safety Made using impact resistant materials Water resistant to IP44 — lowest point = sockets Sealed casing (IP44) — better than old steel splitter. Weighted, self-righting base - will not tip when pulled. Low centre of gravity — see above Integral handle — protected from damage. Cable winds round centre when not in use. Rubber cable strap — secures cable when not in use. Stackable — minimum space required when not in use



Voltage	Weight each	Order Code	List Price/1	Offer Price/1
110V		-2640K	£51.25	£34.34

14m Extension for Site Use

Waterproof spring loaded socket caps. Rated to 16A over six hours. Plugs and sockets conform to **BS 4343 : 1968**.



110V Site Extension



240V Site Extension



Voltage	Weight each	Order Code	List Price/1	Offer Price/1
110V	1.85kg	-2500K	£23.18	£15.53
240V	1.85kg	-2520K	£23.18	£15.53

14m Extension for Square Pin Plugs

With fitted 240V square pin plug and socket. Not suitable for use in wet conditions. Arctic grade cable. Plugs and sockets conform to **BS 4343 : 1968**.



Voltage	Weight each	Order Code	List Price/1	Offer Price/1
240V	1.85kg	-2530K	£23.18	£15.53


4-Way Junction Box with Cable & Plug



Cable Length	Weight each	Order Code	List Price/1	Offer Price/1
5m	3.3kg	-2600K	£57.01	£38.20

Spider Pod 3-Way 110V 16A Splitter

3x 16amp 110V sockets. Tough water resistant housing, ideal for on site use.

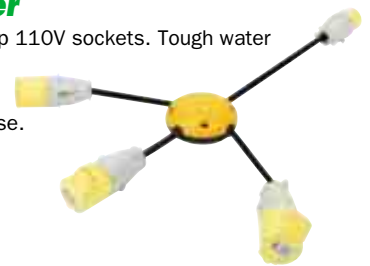

Voltage	Weight each	Order Code	List Price/1	Offer Price/1
110V		-2700K	£30.65	£20.54